


# TECHNICAL DATASHEET

## YUKON-S 10W COB IP65 SENSOR

01-07-2020

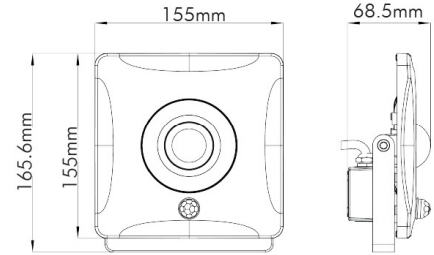

VT/YUKON-S/10W/COB/6000K/IP65/220V/SENSOR/LED FL.

NOTES

### General Informations

Stock Code	3021420
HSC/GTIP Code	9405.40.10.00.00
EAN-13 (Inbox Barcode)	6970233832362
ITF-14 (Outbox Barcode)	36970233832363

### Lighting Characteristics

Luminous Flux	1000 lumen
Time for 60% of Lumen	<0.5 seconds
Light Beam Angle	90°
Flicker	No
LED Type	COB

### Electrical Characteristics

Current Type	AC
Operation Voltage	100-240 Volt
Operation Frequency	50/60 Hertz
Electrical Current	0,05 Amper
Power	10 Watt
Power Factor	>0.9
Luminous Efficiency	100 lumen/Watt
Energy Savings	0,85
Dimmable	No
Electrical Protection Class	Class I

### Mechanical Parameters

IP Protection Class	IP65
Switch On/Off Cycle	15000
Lifetime	50000 hours
Body Material	Glass & Aluminum
Body Colour	White & Black
Diffuser Material	Tempered Glass
Product Height	155 millimeter
Product Width	155 millimeter
Product Depth	68 millimeter
Ambient Temperature (Ta)	-20°C<Ta<45°C

### Electrical Component Specifications

Component Fitting Type	Internal Driver
Driver Input Voltage	100-240 Volt
Driver Input Current	0,05 Amper

### Logistic Informations

Outbox Length	405 millimeter
Outbox Width	335 millimeter
Outbox Height	370 millimeter
Outbox Volume	0,0502 m <sup>3</sup>
Outbox Quantity	20 pieces
Unit Net Weight	0,62 kilogram
Outbox Net Weight	12,4 kilogram
Outbox Gross Weight	14,8 kilogram

IMPORTANT NOTES: VITO reserves the right to change/remove models or specifications partially/completely without any notice. Information, models and photographs of the products in this technical datasheet can not be used, reproduced or republished without permission. However, some parts can be quoted by giving reference and/or chapter number belonging to technical datasheet. Most of the items in the datasheet have been designed by our company within indicated technical specifications inside. Our company is not responsible for errors caused by wrong installation and operating against rules according to qualifications specified in the product details. Photographs printed in this datasheet may not reflect the actual color of the product depending on printing conditions. In the same context, typographical errors may possibly be found in the texts.